







**CHARACTERISTICS:**  
Linear slot diffusers with airfoil section rotating deflector.

**CONSTRUCTION:**  
Anodized extruded aluminium, deflector made of black polypropylene RAL 9005 (version B) or deflector polypropylene white RAL 9003 (W version).

**FIXING:**  
For structural reasons the diffuser is supplied already assembled to the plenum with an airtight system. The assembly is then engaging on the plenum.

					
FERITOIE - SLOTS	LUNGHEZZA-LENGTH	DLXS10	DLXS20	PDLXS	PDLXSI
N.	mm*	A	A	A	A
1	500	48,81	53,72	81,06	118,16
	800	53,45	59,68	86,42	129,32
	1000	59,68	67,11	111,33	170,41
	1500	75,72	85,81	129,88	204,11
2	500	63,85	75,07	84,48	123,05
	800	70,96	83,29	97,17	144,04
	1000	79,45	95,75	123,05	186,52
	1500	103,18	123,07	144,54	224,63

Let op: bovenstaande prijzen zijn in € bruto, excl. 21% BTW; vraag Pairedirect voor een netto aanbieding!


\*N.B.: le lunghezze riportate sono da intendere passaggio aria - The lengths are actual neck sizes

**VERNICIATURA - PAINTING:**  
Colori RAL 9010 - 9016: + 15% - Color RAL 9010 - 9016: + 15%  
Altri colori: prezzi a richiesta - Different colors: prices on request


**MODELLI - MODELS:**  
**DLXS10:** Diffusore standard - Standard diffuser (without sliding control damper and deflector)  
**DLXS20:** Diffusore con deflettore - Diffuser with deflector

#### DISEGNI - DRAWINGS


DLXS10

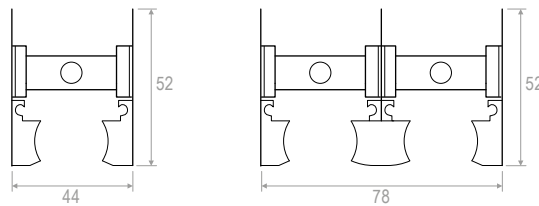

DLXS20

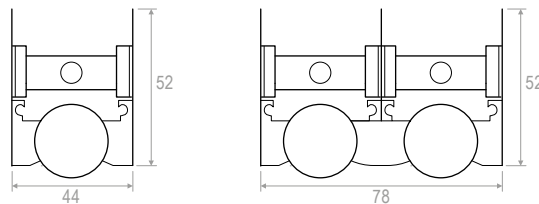

N. feritoie N. slots	Lunghezza mm Length mm	Ø collarino est. N. collarini Ø spigot - N. spitos
1	500	98-1
	800	98-1
	1000	98-2
	1500	98-3
2	500	148-1
	800	148-2
	1000	148-3
	1500	148-4

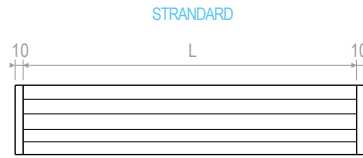

DISEGNI - DRAWINGS

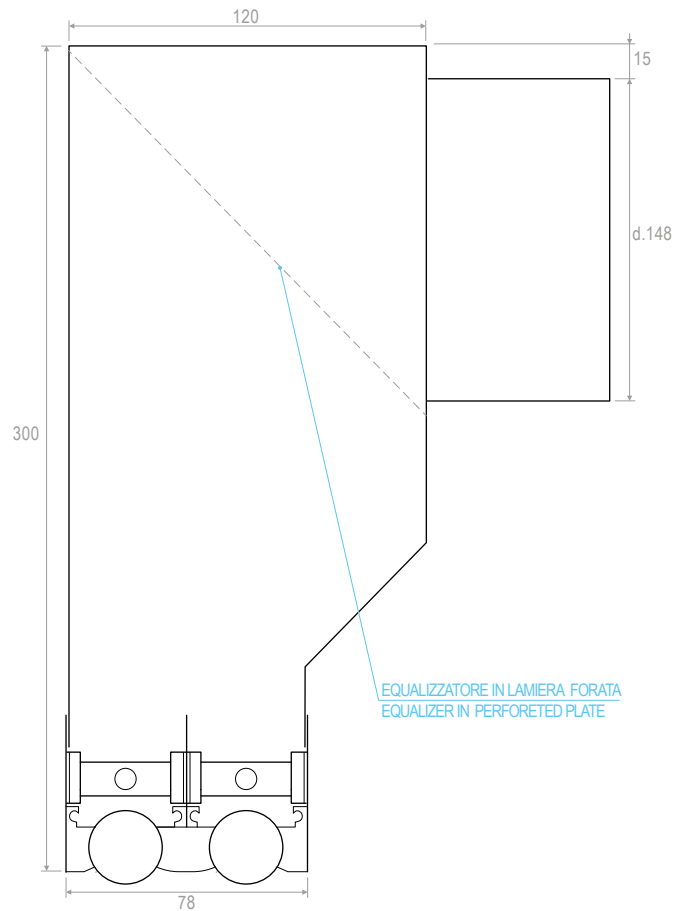
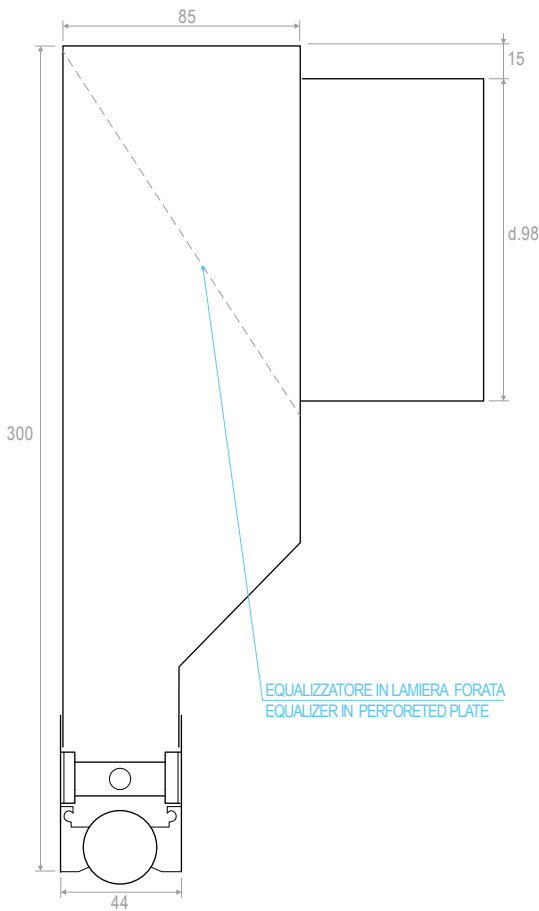


DIAGRAMMA SCELTA RAPIDA - QUICK SELECTION DIAGRAM

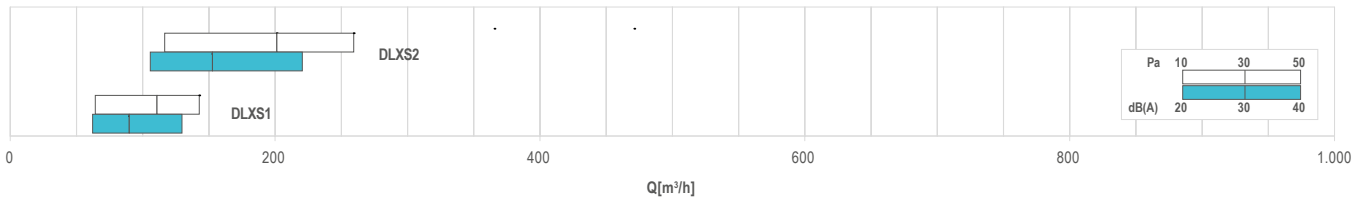


TABELLA DI SELEZIONE - SELECTION TABLE

Modello - Model	A <sub>x</sub> [m²]	Q [m³/h]		L <sub>wa</sub> [dB(A)]		X <sub>(0,25)</sub> [m]		Dp <sub>t</sub> * [Pa]	
		min	max	min	max	min	max	min	max
<b>DLXS1</b>	0,00620	60	140	-	42	3,3	7,7	10	50
<b>DLXS2</b>	0,01240	120	260	23	44	4,3	9,4	10	50

